CAD FILES

AVAILABLE FOR SPECIFIERS



easyniche[®]
TECHNICAL
GUIDE 2017



easyniche TECHNICAL GUIDE 2017

EASYNICHE	
EasyNiche Tile-over accessory	2
Tile-over large rectangle	3
Tile-over small rectangle	4
Tile-over square	5
Tile-over Footrest	6
Exposed 12mm	7
Retrofit	8
Recessed Towel Warmer – Retrofit	9
Recessed Towel Warmer – Exposed/Tile-in	10



EASYNICHE TILE-OVER ACCESSORY

NEW EASYNICHE™ SIZES AVAILABLE TO FIT WITH YOUR CHOICE OF TILE

Start with your overall tile length to select the EasyNicheTM that will work best for your space.

Standard thickness tiles will fit the recess size indicated.

LARGE RECTANGLE **OVERALL** RECESS CODE TILE LENGTH SIZE (mm) 1500mm 1540 X 340 EN1500 1240 X 340 EN1200 1200mm 900mm 940 X 340 EN900 750mm 790 X 340 EN750 **SMALL RECTANGLE OVERALL RECESS** CODE TILE LENGTH SIZE (mm) 640 X 340 EN600 600mm 540 X 340 EN500 500mm 450mm 490 X 340 EN450 350mm 390 X 340 EN350 200mm 240 X 340 EN200 **SQUARE** OVERALL **RECESS** CODE TILE LENGTH SIZE (mm) 300mm 340 X 340 EN300 **FOOT REST OVERALL** RECESS CODE TILE LENGTH SIZE (mm) 140mm 180 X 120 EN140F

SPECIFICATION

- One-piece lightweight construction made from rigid HIPS composite.
- 100% waterproof.
- Immediately ready-to-tile (once interlayer is applied).
- Built-in gradient prevents water ponding.
- Compliant with NZ Building Code and AS3740.
- Fits into 90mm wall cavity.
- 65mm waterproofing flange.
- Suitable for horizontal or vertical installation (except footrest).
- Suitable for all wallboards (recommended 6mm minimum).
- Supplied with self-adhesive connection sheet for waterproofing, primer and fixings.
- Must be installed prior to wallboard, and requires additional framing for correct setup.
- 25-year durability and leak-free warranty.

INSTALLS EASILY INTO WALL FRAMING













Overview only. See installation instructions or video on our website for correct method.





TILE-OVER LARGE RECTANGLE




Perspective





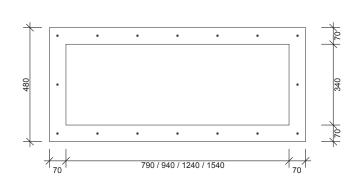


Front Elevation




Side Elevation





TILE-OVER SMALL RECTANGLE




Perspective





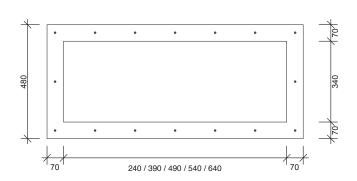


Front Elevation





Side Elevation




TILE-OVER SQUARE








Perspective




Front Elevation




Side Elevation





TILE-OVER FOOTREST






Perspective






Front Elevation





Side Elevation




EXPOSED 12mm








Perspective



Front Elevation



Side Elevation

SPECIFICATION

- One-piece gloss white lightweight construction made from rigid PMMA composite.
- Available in one size 400mm x 300mm.
- 65mm waterproofing flange
- Must be installed prior to wallboard and requires additional framing.
- Supplied with installation materials.
- 7-year warranty.
- To suit 8mm to 12mm tiles.




INSTALLATION STEPS:




Overview only. See installation instructions or video on our website for correct method.



RETROFIT






Plan

400

Perspective




3000

Front Elevation

Side Elevation

INSTALLATION STEPS:

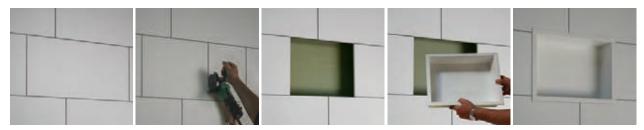

Overview only. See installation instructions or video on our website for correct method.


SPECIFICATION

- One-piece lightweight construction made from rigid gloss white PMMA.
- Available in one size 400mm x 300mm.
- Designed to be installed to new or existing acrylic liner or Ellure™ Walls.
- Protrudes 6mm from wall surface finish.
- Can be installed horizontally or vertically.
- Built in gradient prevents water ponding.
- Supplied with installation materials.
- 7-year warranty.



RECESSED TOWEL WARMER RETROFIT

For installation into prefinished (non-tiled) walls

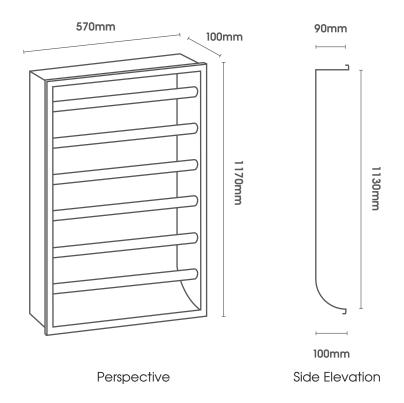

INSTALLATION STEPS:



Overview only. See installation instructions for correct method.


SPECIFICATION

- Available in gloss white finish only.
- Available in one size 1200mm x 600mm.
- Fits into a 90mm wall cavity.
- Electrical components must be installed prior to wallboard.
- Must be retrofitted when wall is finished.
- Supplied with installation materials.



RECESSED TOWEL WARMER EXPOSED/TILE-IN

For installation into tiled walls (prior to tiling)

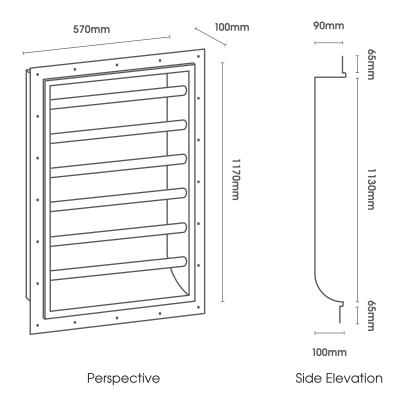

INSTALLATION STEPS:



Overview only. See installation instructions for correct method.

SPECIFICATION

- Available in gloss white finish only.
- Available in one size 1200mm x 600mm.
- Fits into a 90mm wall cavity.
- Features a 65mm waterproofing flange.
- To suit 8mm to 12mm tiles.
- Must be installed prior to wallboard and requires additional framing and electrical work.
- Supplied with installation materials.

